

**USER'S MANUAL**

# PCI Express RS-232 Communication Board

English Version

Third Edition, Jun. 2017



***SUNIX Co., Ltd.***

Tel: +886-2-8913-1987

Fax: +886-2-8913-1986

[Http://www.sunix.com](http://www.sunix.com)

[info@sunix.com](mailto:info@sunix.com)

# PCI Express RS-232 Communication Board

## User's Manual

### Copyright

Copyright© 2017 SUNIX Co., Ltd. All Rights Reserved.

No part of this publication may be reproduced, transcribed, stored in a retrieval system, translated into any language, or transmitted in any form or by any means, photocopying, manual, or otherwise, without prior written permission from SUNIX.

### Disclaimer

SUNIX shall not be liable for any incidental or consequential damages resulting from the performance or use of this equipment.

SUNIX makes no representations or warranties regarding the contents of this manual. Information in this manual has been carefully checked for reliability; however, no guarantee is given as to the correctness of this content. In the interest of continued product improvement, this company reserves the right to revise the manual or include change in the specifications of the product described within it at any time without notice and without obligation to notify any person of such revision or changes. The information contained in this manual is provided for general use by the customers.

### Trademarks

SUNIX is a registered trademark of SUNIX Group.

All other trademarks or registered marks in this manual belong to their respective owners.

### Safety Information

1. Keep this User's Manual for future reference.
2. Always read the safety information carefully.
3. Keep this equipment away from direct sunlight, or in humid or damp places.
4. Do not place this equipment in an unstable position, or on vibrating surface before setting it up.
5. Do not use or place this equipment near magnetic fields, televisions, or radios to avoid electronic interface that affects device performance.

## Regulatory Compliance

### FCC Conditions

This equipment has been tested and found to comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This equipment may not cause harmful interference
- (2) This equipment must accept any interference received, including interference that may cause undesired operation.

**Important!** Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment. Use an approved phone set.

### CE

This equipment is in compliance with the requirements of the following regulations: EN 55022:

CLASS B

### WEEE Information

For EU (European Union) member users: According to the WEEE (Waste electrical and electronic equipment) Directive, do not dispose of this product as household waste or commercial waste. Waste electrical and electronic equipment should be appropriately collected and recycled as required by practices established for your country. For information on recycling of this product, please contact your local authorities, your household waste disposal service or the shop where you purchased the product.

### BSMI 聲明

限用物質含有情況標示資訊網站請參考下列網址：<http://www.sunix.com.tw>

操作說明：選擇頁面之產品/型號/文件下載區(RoHS文件)



# Table of Contents

## Chapter 1 Introduction

1.1 Overview .....	6
1.2 Package Checklist .....	6
1.3 Product Features .....	7
1.4 Product Specifications .....	8

## Chapter 2 Hardware Installation

2.1 Hardware Installation .....	10
2.2 Pin Assignment .....	11

## Chapter 3 Software Installation

3.1 Windows Driver Installation .....	15
3.2 Windows Driver Uninstallation .....	20
3.3 Linux Driver Installation .....	21
3.4 Verify Installation .....	23

## Chapter 4 Port Configuration

4.1 Configure Serial Port Settings .....	25
4.2 Com Port Number Settings .....	26
4.3 Com I/O Resource .....	26
4.4 FIFO Settings .....	27
4.5 Advanced Settings .....	28

## Chapter 5 Appendix

5.1 Troubleshooting .....	30
5.2 Product Family .....	32
5.3 Contact Information .....	36

## WHQL Certification Approval

The Designed for Microsoft Windows 32/64-bit operation system WHQL logo identifies products that meet Microsoft's quality standards, SUNIX I/O products carry with this logo and listed on Windows Catalog. WHQL logo includes below operation system version

Microsoft Windows Client: Windows XP / Vista / 7 / 8.x / 10 (X86/X64)

Microsoft Windows Server: Windows 2003 / 2008 / 2012 / 2016 (X64)

# 1.

## Introduction

---

RS-232 Golden I/O series, a line of PCI Express Multi-Port Serial Communication Board, is designed to meet PCI Express Base Specification Ver2.0. It can be installed in virtually any available PC system and compatible with all major operating systems. Users do not need to manually set jumpers to configure I/O addresses and IRQ locations.

These boards offer independent serial ports for connecting terminals, modems, printers, scanners, cash registers, bar code readers, keypads, numeric displays, electrical scales, data acquisition equipment, and other serial devices for the PC and compatible systems. This board offers a reliable and high performance solution for serial multi-port communications.

The following topics covered in this chapter:

- ◆ **1.1 Overview**
- ◆ **1.2 Package Checklist**
- ◆ **1.3 Product Features**
- ◆ **1.4 Product Specifications**

## 1.1 Overview

Thanks for purchasing SUNIX PCI Express Multi-Port Communication Board; it is compatible with RS-232.V24 standard serial interfaces. User can expand Multi RS-232 ports on PC-based system by installing in PCI Express x1, x2, x4, x8 and x16 lane slots. Each port has on-chip hardware and software flow control, a built-in 128-byte Tx/Rx FIFO, and WHQL certificated device drivers. This board is designed with SUNIX 16C950 UART controller and as well built with many of SUNIX advanced features and technologies, making it the best solution for commercial and industrial automation applications.

## 1.2 Package Checklist

Please check if the following items are present and in good condition upon opening your package. Contact your vendor if any item is damaged or missing.

### 1. Hardware:

Serial Communication Board:

RS-232 PCI Express Multi-Port Communication Board × 1

Cable: (Depend on what product you bought)

\* 4 ports series: DB44M to 4 ports DB9/25 Male Cable × 1

\* 8 ports series: DB62M to 8 ports DB9/25 Male Cable × 1

2. CD Driver

3. Quick Installation Guide

4. User's Manual (This document)

## 1.3 Product Features

- Expands Multi RS-232 serial ports on the system
- High performance SUNIX 16C950 compatible UART controller on-board.
- Ultra low power consumption design for Green Environment.
- Designed to meet PCI Express Base Specification Revision 2.0.
- Supports x1, x2, x4, x8, x16 (lane) PCI Express Bus connector keys.
- Data transmission speeds up to 115.2Kbps (\*921.6Kbps Optional).
- On-chip hardware auto flow control to guarantee no data loss.
- Built-in  $\pm 15$ KV ESD protection for all serial signals.
- Plug-n-Play, I/O address and IRQ assigned by BIOS.
- Certified by CE, FCC, RoHS, and Microsoft WHQL approval.
- Support Microsoft Windows, Linux, and DOS.

**Note:**

SUNIX High Speed RS-232 Card (H Version) baud rate setting supports 921.6Kpbs, and please refers to the Chapter5 Appendix, Product Family for detail.



## 1.4 Product Specifications

### Serial Communication

<b>Interface</b>	RS-232	<b>Signal</b>	TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND
<b>Controller</b>	SUNIX SUN2412 (16C950 UART Compatible)	<b>Baud rate</b>	50bps ~115.2Kbps (921.6Kpbs Optional)
<b>BUS</b>	PCI Express one lane (x1)	<b>Stop bit</b>	1, 1.5, 2
<b>No. of Port</b>	2/4/8/16-port	<b>Parity</b>	even, odd, none, mark, space
<b>IRQ &amp; IO</b>	Assigned by System	<b>Flow Control</b>	None, Xon/Xoff, RTS/CTS
<b>FIFO</b>	128byte Hardware	<b>Connector</b>	DB9 / 25 Male
<b>Protection</b>	±15KV ESD protection for each signal Human Body Model (HBM)		

### Driver Support

<b>Windows Client</b>	XP / Vista / 7 / 8.x / 10 (X86/X64)
<b>Windows Server</b>	2003 / 2008 / 2012 / 2016 (X64)
<b>Microsoft Embedded</b>	XP Embedded / POS Ready / Embedded System
<b>Linux</b>	Linux 2.x / 3.x / 4.x
<b>DOS</b>	DOS
<b>FreeBSD</b>	FreeBSD 5.3~5.5 / 6.0~6.4
<b>QNX</b>	QNX 6.3.2 / 6.4.0
<b>IBM OS/2*</b>	WARP 3 / WARP 4
<b>SCO UnixWare*</b>	UnixWare 7.1.3 / 7.1.4 Open Server 5.0.7 / 6.0
<b>Sun Microsystems*</b>	Solaris 10
<b>Note :</b> “ * “ Supported by special inquiry.	

### Regulatory Approvals

<b>Hardware</b>	EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, FCC Part 15 Class B, RoHS
<b>Software</b>	Microsoft WHQL Windows Microsoft Client: XP / Vista / 7 / 8.x / 10 (X86/X64) Microsoft Server: 2003 / 2008 / 2012 / 2016 (X64)

### Environment

<b>Operation Temperature</b>	0 to 60°C (32 to 140°F)
<b>Operation Humidity</b>	5 to 95% RH
<b>Storage Temperature</b>	-20 to 85°C (-4 to 185°F)

# 2.

## Hardware Installation

---

This chapter includes information about hardware installation for RS-232 PCI Express Multi-Port Communication Board. The following topics are covered:

- ◆ **2.1 Hardware Installation**
- ◆ **2.2 Pin Assignments**

## 2.1 Hardware Installation

The hardware installation of PCI Express serial boards is easy to carry out. Before inserting the card into the PCI Express bus, please follow the detailed steps given below to install the PCI Express serial board in your computer.



### Safety First

To avoid damaging your system and boards, make sure your PC's power is turned off before installing PCI card.

**Step 1:** Turn your PC's power off, and shut off the power to any peripheral.

**Step 2:** Remove the power plug from the plug socket.


**Step 3:** Remove the cover from the computer case.

**Step 4:** If fitted. Remove the metal cover plate on the rear of a free PCI-E slot.

**Step 5:** Insert PCI Express Multi-Port Communication Board into the free PCI Express slot and screw it firmly on the bracket side.


**Step 6:** Place the cover back onto the computer.

**Step 7:** Insert the plug into the plug socket.

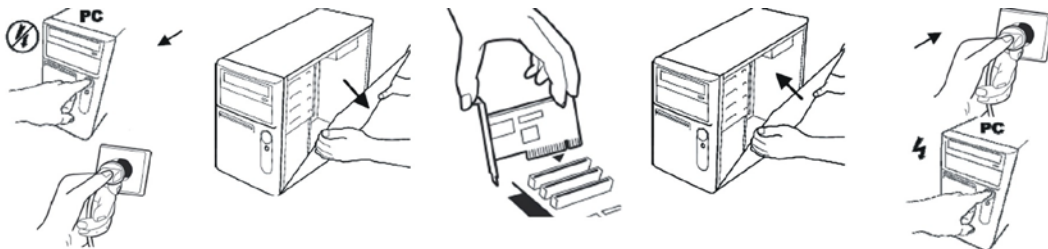

## 2.2 Pin Assignment

This chapter provides the pin assignments for SUNIX PCI Express Multi-Port Communication Board, as well as the pin assignments for the optional accessories.

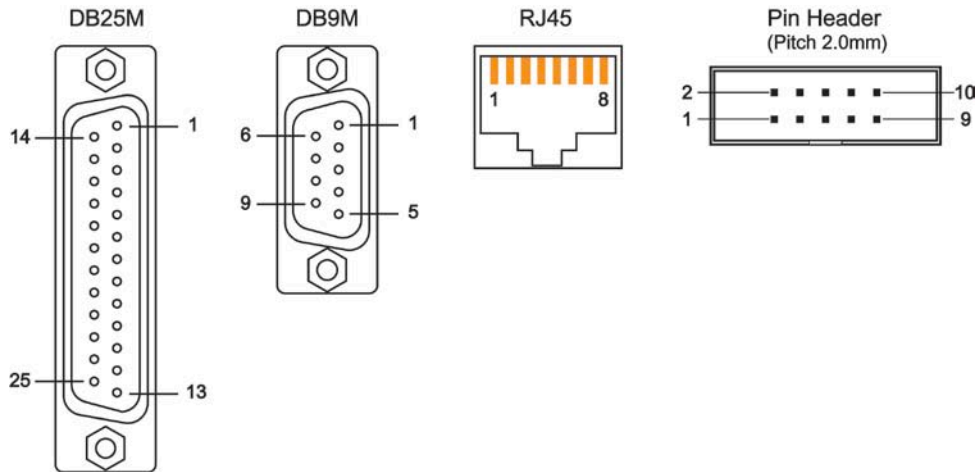

PIN	DB9M	DB25M	RJ45	Pin Header
DCD	1	8	7	1
RxD	2	3	6	3
TxD	3	2	3	5
DTR	4	20	2	7
GND	5	7	4	9
DSR	6	6	8	2
RTS	7	4	1	4
CTS	8	5	5	6
RI	9	22	-	8

**Note:**

8-port RS-232 card product series does not build the 9<sup>th</sup> pin RI signal.

SUNIX 2-port RS-232 Low Profile Card builds DB44F connector on board.

SUNIX DB44 Female 2 ports Serial Communication Boards Pin Assignment						
RS-232	Port		1	2		
	Signal					
		TxD		11		15
		RxD		40		44
		RTS		10		14
		CTS		39		43
		DSR		38		42
		GND		25		29
		DCD		26		30
		DTR		9		13
	RI		24	28		

SUNIX 4-port RS-232 Card builds DB44F connector on board.

SUNIX DB44 Female 4 ports Serial Communication Boards Pin Assignment									
RS-232	Port				1	2	3	4	
	Signal								
		TxD			3	7	11	15	
		RxD			32	36	40	44	
		RTS			2	6	10	14	
		CTS			31	35	39	43	
		DSR			18	34	38	42	
		GND			4	21	25	29	
		DCD			17	22	26	30	
		DTR			1	5	9	13	
	RI			16	20	24	28		

SUNIX 8-port RS-232 Card builds DB62F connector on board.

SUNIX <b>DB62</b> Female 8 ports Serial Communication Boards Pin Assignment									
RS-232	Port	1	2	3	4	5	6	7	8
	Signal	1	2	3	4	5	6	7	8
	DCD	24	45	8	50	11	55	58	21
	RxD	44	47	49	52	54	57	60	62
	TxD	23	26	28	31	34	36	39	41
	DTR	2	5	7	10	13	15	18	20
	DSR	1	4	6	9	12	14	17	19
	RTS	22	25	27	30	33	35	38	40
	CTS	43	46	48	51	53	56	59	61
GND	GND	GND	GND	GND	GND	GND	GND	GND	

SUNIX 8-port RS-232 Low Profile Card builds DB68F connector on board.

SUNIX <b>DB68</b> Female 8 ports Serial Communication Boards Pin Assignment									
RS-232	Port	1	2	3	4	5	6	7	8
	Signal	1	2	3	4	5	6	7	8
	TxD	6	15	24	33	63	54	45	36
	RxD	3	12	21	30	66	57	48	39
	RTS	7	16	25	34	62	53	44	35
	CTS	4	13	22	31	65	56	47	38
	DSR	2	11	20	29	67	58	49	40
	GND	8	9	26	27	61	60	43	42
	DCD	1	10	19	28	68	59	50	41
DTR	5	14	23	32	64	55	46	37	
RI	-	-	-	-	-	-	-	-	-

# 3.

## Driver Installation

---

After installing the RS-232 PCI Express Multi-Port Communication Board in your system successfully, please follow the step by step software installation guide to confirm how to install appropriate driver and configure the serial port settings.

The driver for PCI Express serial board supports Windows and Linux operating systems, and you can select your requirement in the following chapter:


The following topics covered in this chapter:

- ◆ **3.1 Windows Driver Installation**
- ◆ **3.2 Windows Driver Uninstallation**
- ◆ **3.3 Linux Driver Installation**
- ◆ **3.4 Verify Installation**

### 3.1 Windows Driver Installation

Please refer to following instructions to install the driver for the first time under Windows operation system. You will need to plug the board in an available PCI Express slot first, before installing the driver.

- (1) After the board is physically installed and the PC boots up, system will detect the PCI Express Serial card and prompt for driver installation wizard, please choose cancel.
- (2) Put CD driver bound with product in your CD / DVD ROM drive. Please select autorun.exe., then select **“Driver Installation”**.

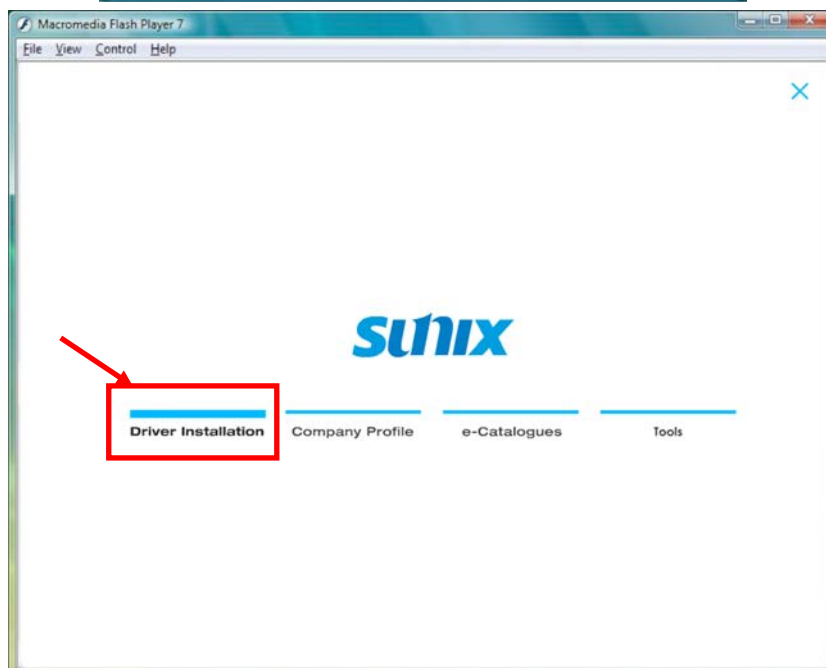





(3) Please select the product interface you bought, such as PCI Express.




(4) Please select the O.S. version you are using, such as Windows Vista. Then system will process the driver installation step automatically.

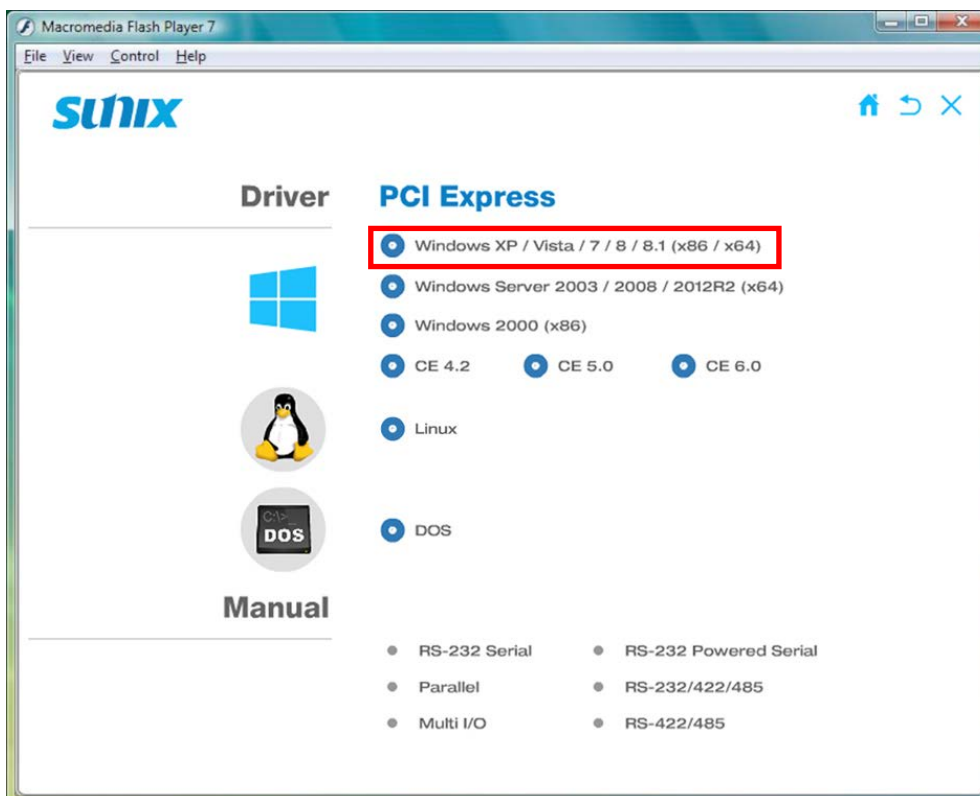


(5) Please select driver language for your operation system.

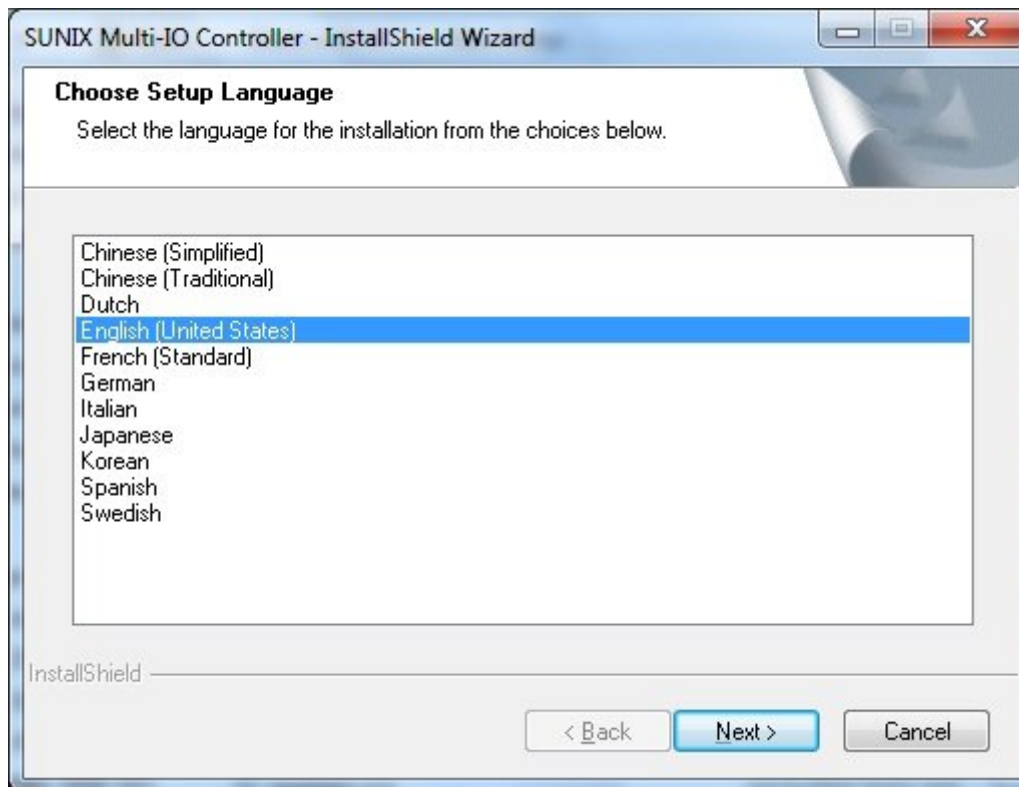


(6) Click “**Next**” to continue driver installation steps.

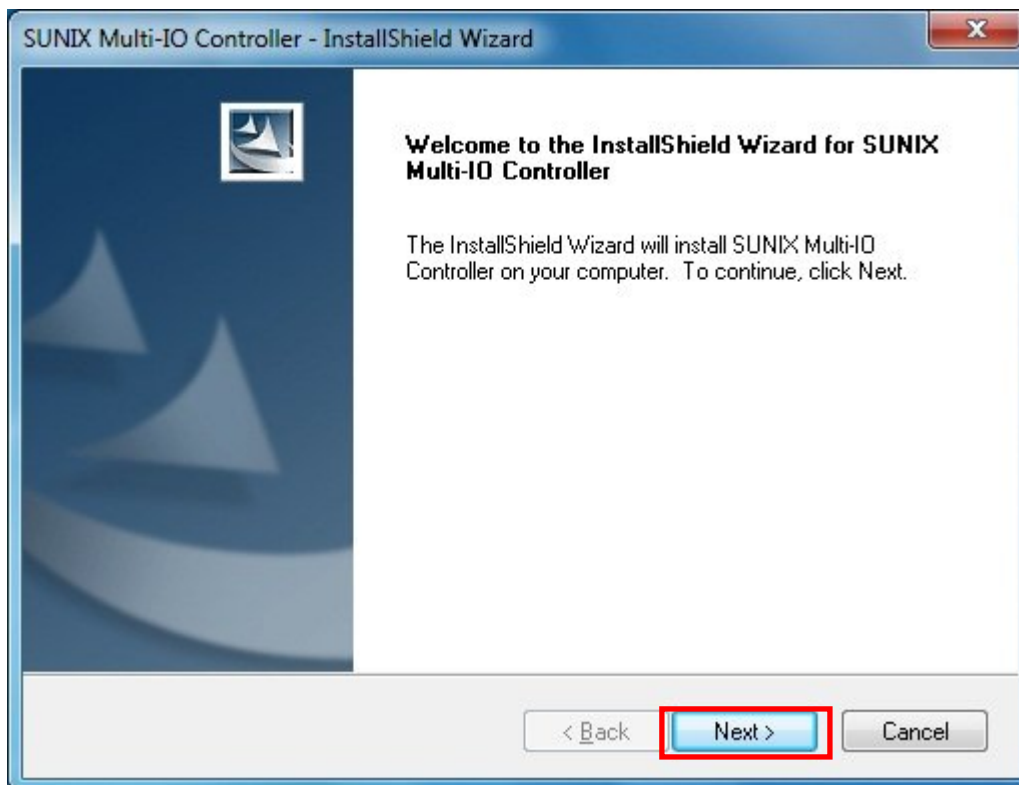


(7) Click “**Install**” to continue driver installation steps.

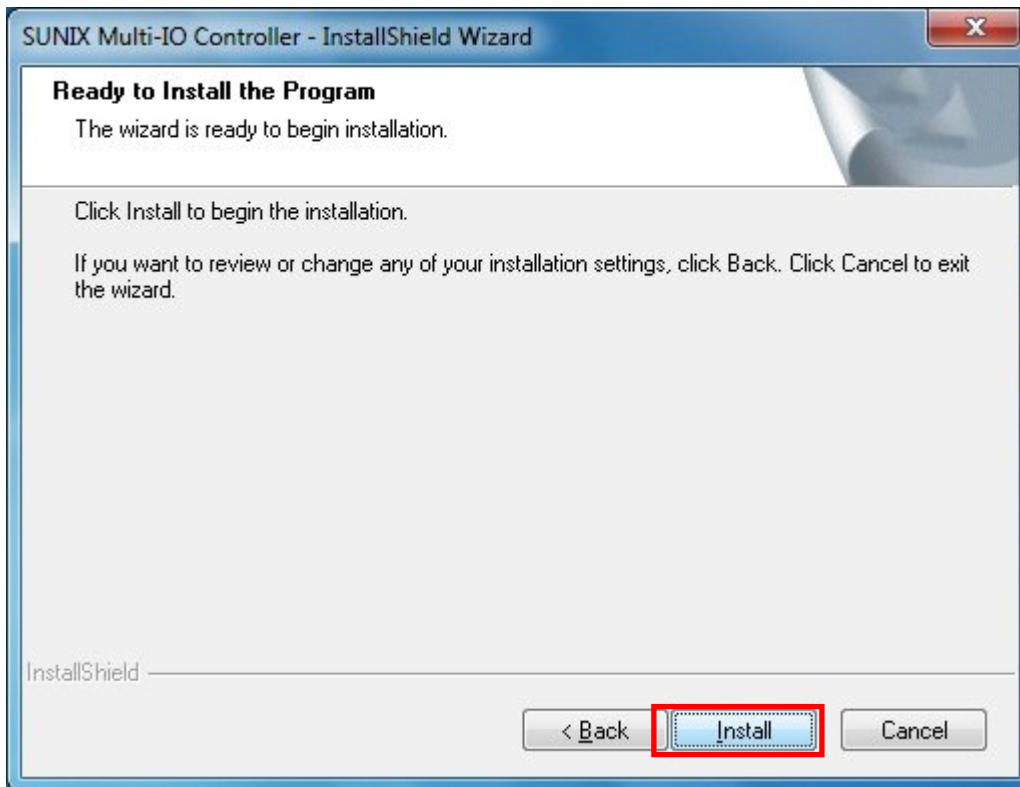

(8) System will install driver automatically. It takes about one minute.

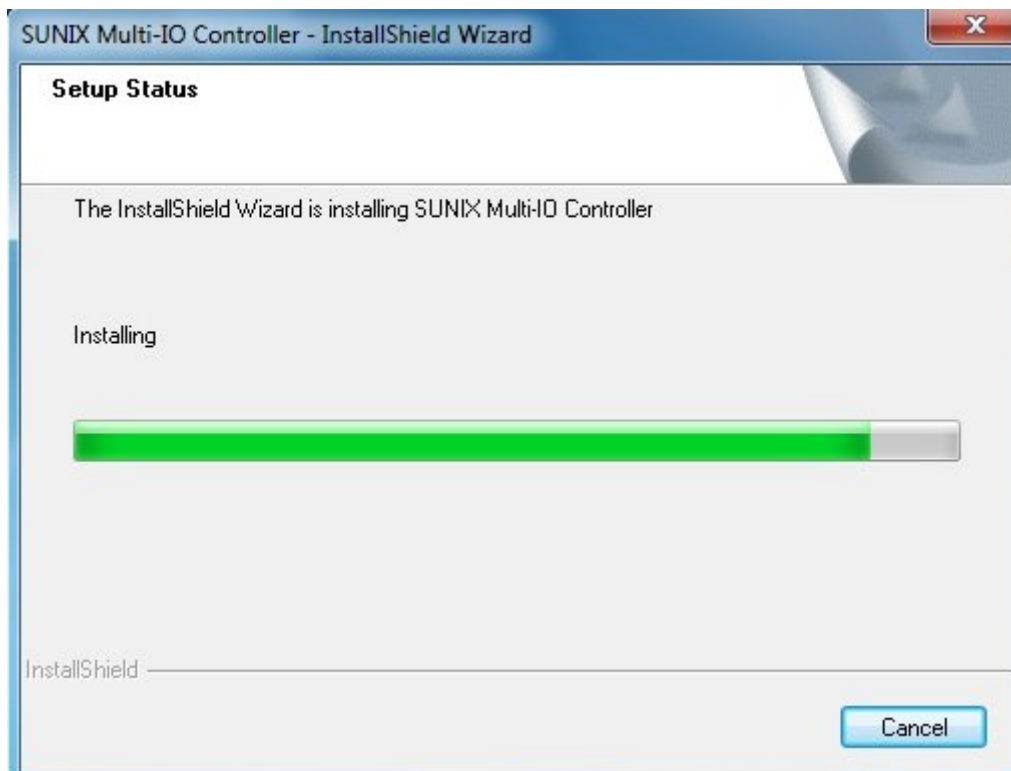

(9) Click “**Finish**” to end installation steps.

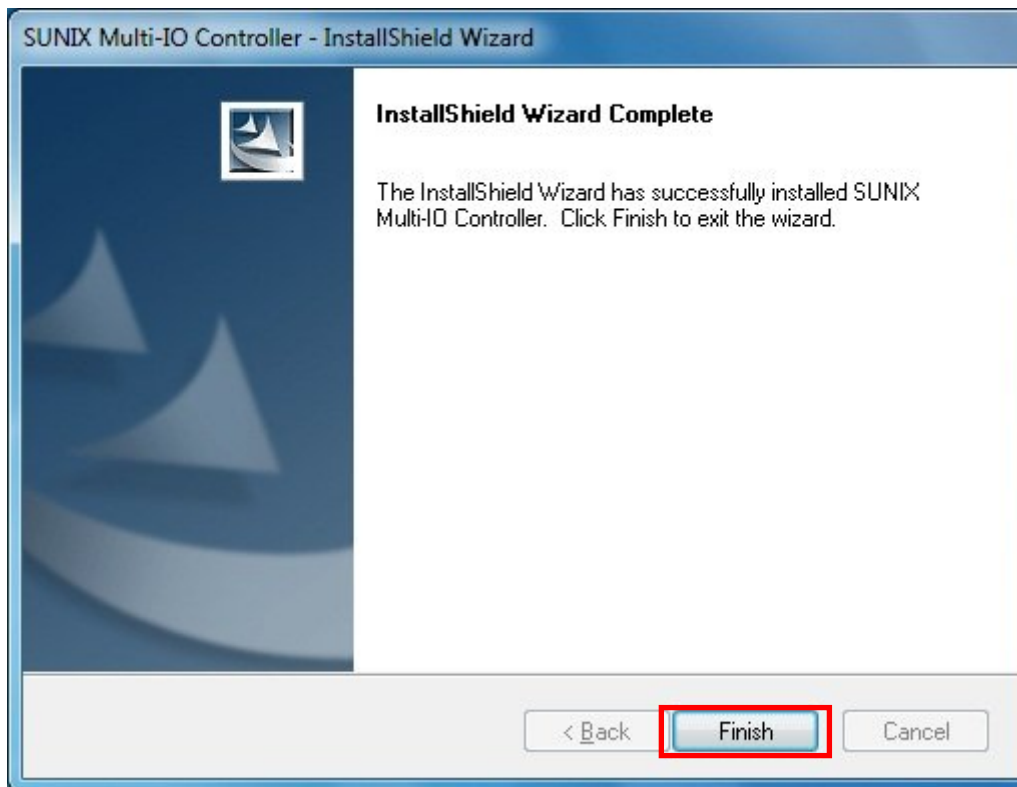


### 3.2 Windows Driver Uninstallation


Please refer to following instructions uninstall Multi-I/O card driver.

- (1) Click on the “**Programs and Features**” tab in the Windows Control Panel.

**Start > Controller Panel > Programs and Features**

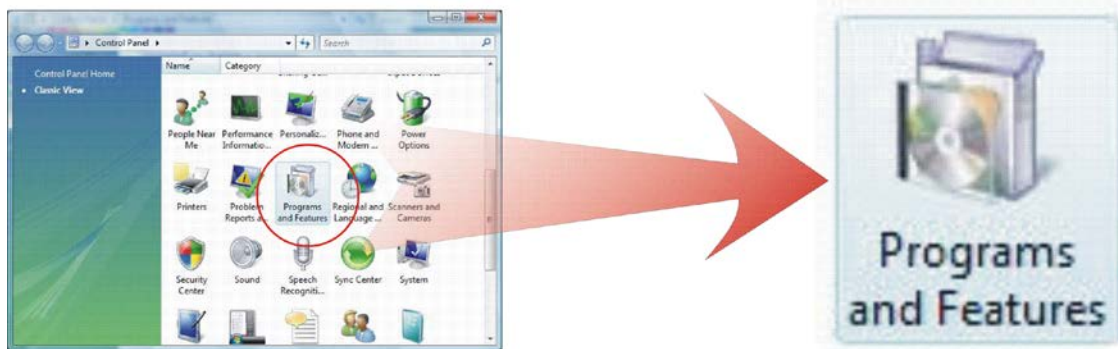

- (2) Entry Uninstall or change a program page, and double click “**Windows Driver Package – SUNIX Co., Ltd SUNIX Multi-I/O Controller**” to process driver uninstallation procedure.

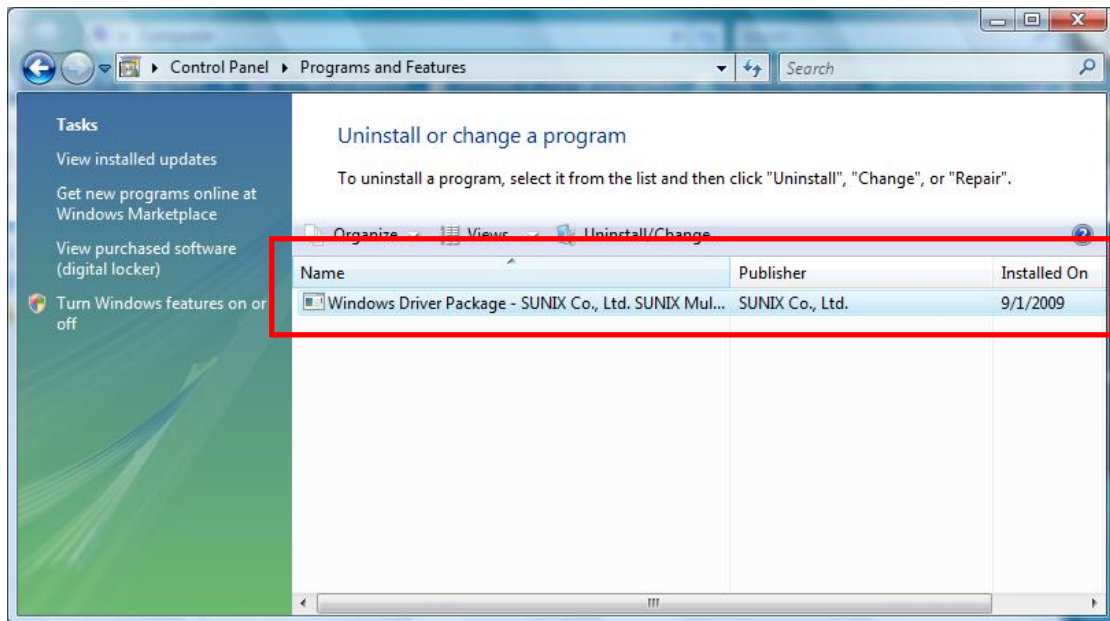

### 3.3 Linux Driver Installation

This installation guide describes the procedures to install the PCI serial board in Linux kernel 2.x, 3.x and 4.x Please refer to "snx\_Vx.x.x.x.zip" for driver installation detail in CD Driver (Linux folder) directory.

**: \PCI\_IO \Linux**

#### (1) Driver install

Please create a directory under root directory, e.g /temp, do commands:

```
# cd /  
# mkdir temp
```

After get driver file "snx\_Vx.x.x.x.zip". Copy file to /temp directory, then extract and install, do commands:

```
# cp snx_Vx.x.x.x.zip /temp  
# cd /temp  
# unzip snx_Vx.x.x.x.zip  
# cd /temp/snx  
# make clean ; make install
```

\*\*\*\*\*

\* If system is Suse 9.0 and errors occur when

\* "make clean ; make install", do commands:

\*

\* # cd /usr/src/linux/

\* # make cloneconfig

\* # make dep

\*

\* then do "make clean ; make install" again in /temp/snx

\*\*\*\*\*

---

Load driver module, do command:

```
# modprobe snx  
or  
# insmod /temp/snx/driver/snx.ko (snx.o for kernel 2.4)
```

Check driver module, do command:

```
# lsmod | grep snx
```

Unload driver, do command:

```
# rmmod snx
```

## (2) Device node creation

Each serial port has one device node which is named "ttySNX?", maximum up to 32 serial ports.

This setp will be done when do "make clean ; make install", if device nodes aren't in /dev, do commands:

```
# cd /temp/snx/snxmknod  
# ./snxmknod
```

This will create device nodes in /dev.


If there are more than two boards installed, serial port device nameing convention please refer to F1.

### 3.4 Verify Installation


You can use Windows “**Device Manager**” to verify proper installation.

(1) Click on the “**Programs and Features**” tab in the Windows Control Panel.

**Start > Controller Panel > Device Manager**

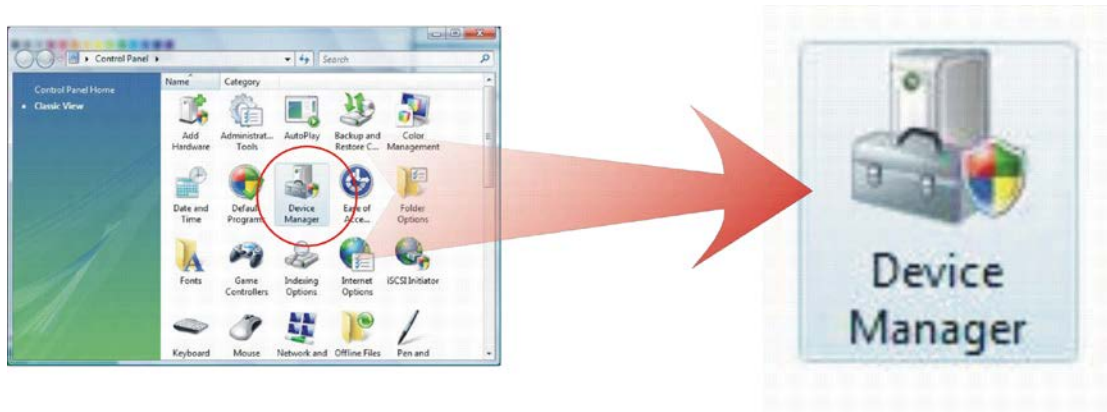

(2) In the Device Manager window, you should see this board under **Multifunction adapters** (4-port RS-232 Serial Card in this example). You should also see SUNIX COM port under **Ports (COM & LPT)**.

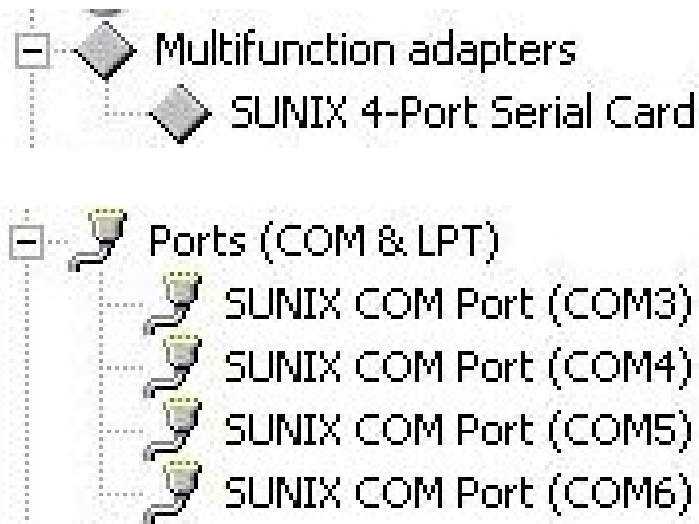



# 4.

## Port Configuration

---

This chapter shows all Serial COM port settings that user came with usually, such as COM port number, FIFO length(size), baud rate, IO address and others.


The following topics covered in this chapter:

- ◆ **4.1 Configure Serial Port Settings**
- ◆ **4.2 COM Port Number Settings**
- ◆ **4.3 COM I/O Resource**
- ◆ **4.4 FIFO Settings**
- ◆ **4.5 Advanced Settings**


## 4.1 Configure Serial Port Settings

After the board and serial port drivers are installed, please refer to following instructions to configure Serial COM settings.

- (1) Please launch the “**Device Manager**”.
- (2) Right click the “**SUNIX Serial Card**” item from the “**Multifunction adapters**” sub-tree and click “**Properties**”.

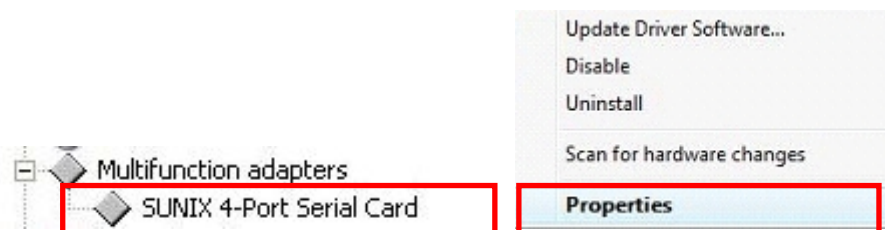


- (3) On the “**Port Control**” tab, select a port to configure.
  - \* Click “**OK**” to approve the settings for the selected port.
  - \* Click “**Set to All**” to approve the settings for all COM ports.

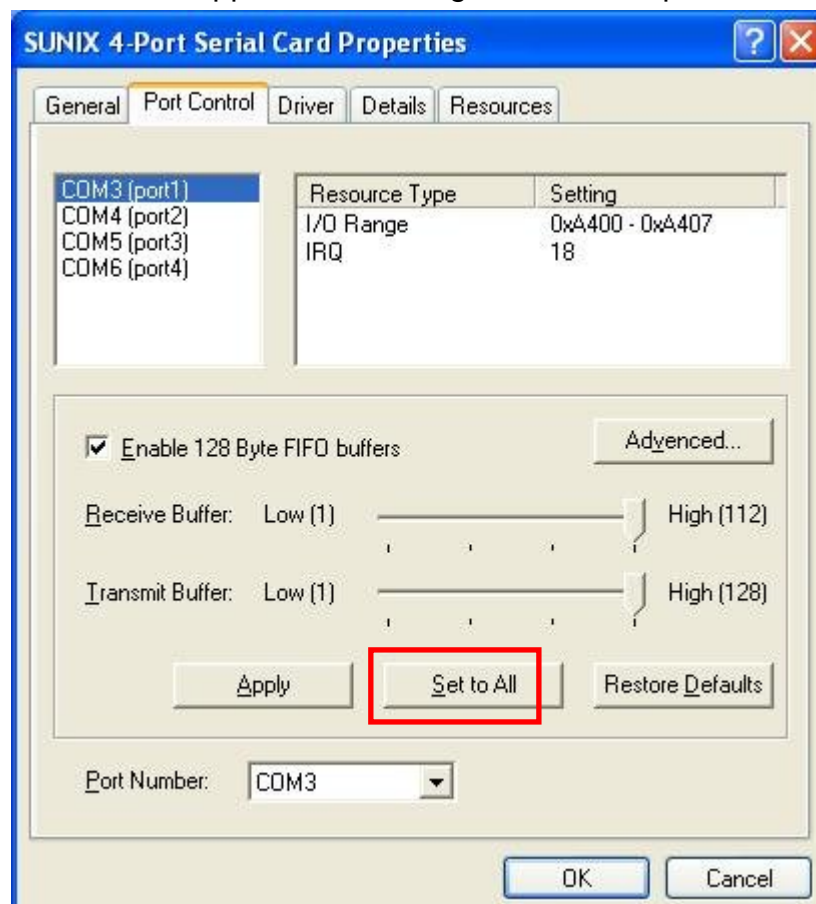

## 4.2 COM Port Number Settings


Under Port Number, select a COM number to assign to the serial port. Click “OK” to approve the settings for the selected port.

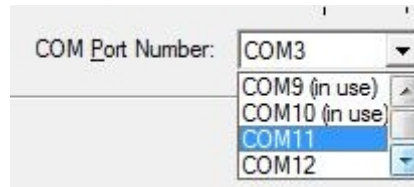

**Note:** In order to prevent system resource conflict, do not select “in use” port.

## 4.3 COM I/O Resource

User can read the COM “IO Range” and “IRQ” located in system by selecting COM port.

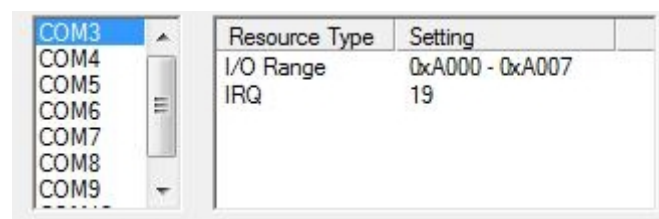


IRQ and I/O address is automatically assigned by the mainboard PCI BIOS automatically (before COM card driver installing). User can NOT assign legacy ISA address (3F8, 3E8, 2F8, 2E8) for the specific COM port. But for IRQ setting, user can set specific IRQ value for this PCI bus slot via mainboard’s BIOS settings (not via SUNIX driver). But all COM ports will share one IRQ value.

## 4.4 FIFO Settings

Select an Rx FIFO Trigger and Tx FIFO Size.

The default Rx FIFO Trigger is 112 bytes. The default Tx FIFO Size is 128 bytes. Click **“Set to All”** to change this setting for all serial ports on the board. Then click **“OK”** to save the settings.

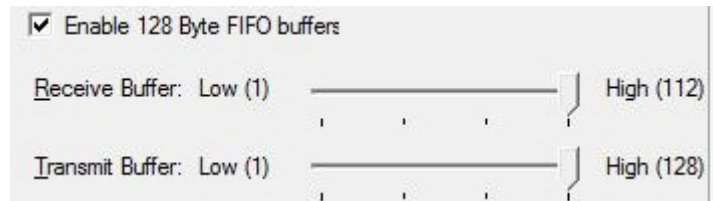

### Receive FIFO interrupt trigger level:

When the level of data in the receiver FIFO reaches this value, a receiver data interrupt is triggered.


### Transmit FIFO interrupt trigger level:

When the level of data in the transmit FIFO falls below this value, a transmitter interrupt is triggered. Setting this value to zero will not trigger an interrupt until the transmitter is completely idle.

The FIFO trigger levels can be fine tuned to gain optimum performance, depending on system performance, baud rate used, levels of serial traffic etc.

## 4.5 Advanced Settings

User can control RS-232 communication in Advanced Port Control page through “**Advanced**” settings.

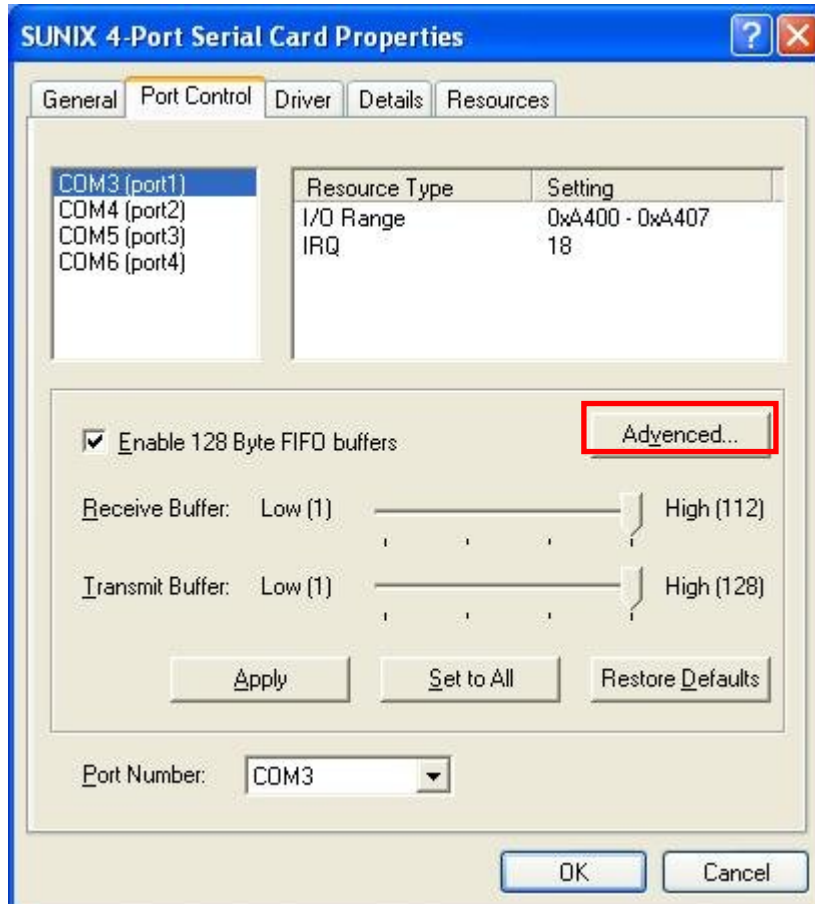

## Clock Rate

This is the “Data Rate” value for on board crystal frequency of input clock. The baud rate can optionally be adjusted according to the data rate required. The clock pre-divisor is used to divide the input clock prior to baud rate generation.

This parameter must matches with the oscillator (crystal) frequency on the board. System default is **14745600 Hz**. We do NOT recommend for modification without SUNIX instruction. User can click “**Defaults**” button back to manufactory settings.



# 5.

## Appendix

---

This chapter shows some problems that user came with usually. Also you can check it if the PCI Express serial board can not work properly in your system after following hardware and software installation steps. In addition, you could contact with us for detail technical product information.

In this appendix, we cover the following topics.

- ◆ **5.1 Troubleshooting**
- ◆ **5.2 Product Family**
- ◆ **5.3 Contact Information**

## 5.1 Troubleshooting

### 1. System fails to find the PCI Express serial board or COM port.


**A:** It may cause by following issue:

- a. The board is not properly plugged into the PCI Express slot.
- b. Please clean the golden finger.
- c. The PCI Express slot is defective. Please try other slots until you find one that works.
- d. The mainboard does not have an available IRQ for the PCI Express serial board. Enter the PC.s BIOS and make sure an IRQ setting is available in the PCI/PnP settings.
- e. The board itself might be defective. You can try another mainboard testing this board working or not.

### 2. There is a blue screen when I entry operation system.

- A:**
- a. The possible reason is an IRQ or I/O address conflict with other PCI bus adapters, such as LAN or serial boards, or with the system BIOS. Refer to the corresponding problem in the previous FAQ for solutions.
  - b. Please check driver update from your vendor.

### 3. There are some exclamation marks in device manager and serial ports can not work properly.



- A:**
- a. It caused by the wrong driver installing or hardware settings. Please turn off your computer firstly and re-install hardware and software, especially re-install the correct driver.
  - b. Please update driver manually by specifying driver INF file folder.


### 4. Should I enable auto flow control features?

- A:** Enable Auto CTS/RTS Flow Control means the CTS/RTS flow control is controlled by hardware automatically. System will be more stable if the function is enabled. Please make sure your serial device and cable wiring before enabling the hardware flow control function.

## 5. How large FIFO length I should set?

**A:** FIFO (First-in-First-out) buffers are used to reduce the frequency of interrupt processes for UART chips. The size of the buffer will determine the number of times the cards need to interrupt the computer's CPU in order to process a string of data. With larger FIFO buffer size; there is more data flow and less interruption to the CPU, therefore allowing the CPU to be free to handle other more crucial tasks.

Set the Receive/Transmit Buffer to higher value will get faster performance because the interrupts will be reduced, but the time for interrupt service routine will become shorter. The receive buffer overflow will be easily happened if the CPU speed is not enough to handle. If the system is not stable, select the lower value to correct problems.

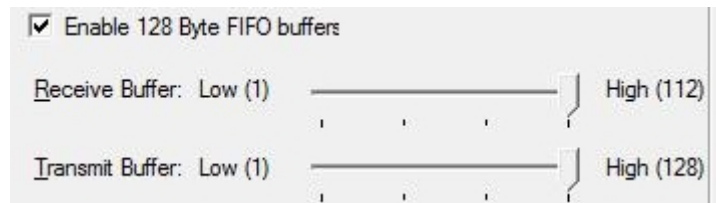



## 5.2 Product Family

SUNIX provides kinds of RS-232/422/485 interface cards for customer selection, including PCI Express, PCI, and PCI/104 card. Please refer to the product family table for reference.

RS-232 PCI Express Interface						
Port	Connecter	Baud Rate	ESD Protection	Power output	Bracket	Model NO.
16	Mini SCSI 68 Female	921.6Kbps	±15KV	-	Standard	SER5416H
				-	Standard	SER5466A
8	DB62 Female	115.2 kbps		-	Low profile	SER5466AL
				-	Standard	SER5466H
	Mini SCSI 68 Female	921.6Kbps		-	Low profile	SER5466HL
				-	Standard	SER6456A
4	DB44 Female	115.2 kbps		-	Standard	SER6456P
				5V/12V		SER6456AL
				-	Low profile	SER6456PL
				5V/12V		SER6456H
	921.6Kbps	-		Standard	SER6456PH	
		5V/12V			SER6456HL	
		-		Low profile	SER6456PHL	
		5V/12V			SER6437A	
2	DB9 Male	115.2 kbps		-	Standard	SER6437P
				5V/12V		SER6437AL
	DB44 Female	921.6Kbps		-	Low profile	SER6437PL
				5V/12V		SER6437H
	DB9 Male	-		Standard	SER6437PH	
		5V/12V			SER6437HL	
	DB44 Female	-		Low profile	SER6437PHL	
		5V/12V			SER6437UHL	
	5x2 Pin Header			-		

RS-232 PCI Interface						
Port	Connector	Baud Rate	ESD Protection	Power output	Bracket	Model NO.
8	Mini SCSI 68	921.6Kbps	±15KV	-	Standard	SER5016H
	DB62 Female	115.2Kbps	±2KV	-	Standard	SER5066A
	Mini SCSI 68			-	Low profile	SER5066AL
	5x2 Pin Header			-	Standard	SER5066U
	5x2 Pin Header			-	Low profile	SER5066UL
	DB62 Female	921.6Kbps	±15KV	-	Standard	SER5066H
	Mini SCSI 68			-	Low profile	SER5066HL
	5x2 Pin Header			-	Standard	SER5066UH
5x2 Pin Header	-			Low profile	SER5066UHL	
4	DB44 Female	115.2Kbps	±2KV	-	Standard	SER5056A
				5V/12V		SER5056P
				-	Low profile	SER5056AL
				5V/12V		SER5056PL
	5x2 Pin Header	921.6Kbps	±15KV	-	Standard	SER5056U
				-	Low profile	SER5056UL
	DB44 Female			-	Standard	SER5056H
				-	Low profile	SER5056HL
5x2 Pin Header	5V/12V			Standard	SER5056PH	
	-				SER5056UH	
DB44 Female	-			Low profile	SER5056UHL	
	5V/12V				SER5056PHL	
2	DB9 Male	115.2Kbps	±2KV	-	Standard	SER5037A
				5V/12V		SER5037P
	5x2 Pin Header			-	Low profile	SER5037U
	DB44 Female			-		SER5037AL
	5x2 Pin Header	921.6Kbps	±15KV	5V/12V	Low profile	SER5037PL
				-		SER5037UL
	DB9 Male			-	Standard	SER5037H
				5V/12V		SER5037PH
5x2 Pin Header	-			Low profile	SER5037UH	
	-				SER5037HL	
DB44 Female	5V/12V			Low profile	SER5037PHL	
	-				SER5037UHL	
1	DB9 Male	115.2Kbps	±2KV	-	Standard	SER5027A
				5V/12V		SER5027P
				-	Low profile	SER5027AL
				5V/12V		SER5027PL
		921.6Kbps	±15KV	-	Standard	SER5027H
				5V/12V		SER5027PH
				-	Low profile	SER5027HL
				5V/12V		SER5027PHL

RS-232 PCI/104 Interface				
Port	Connecter	Baud Rate	ESD Protection	Model NO.
8	5x2 Pin Header	115.2Kbps	±2KV	SER5337A
4				SER5356A
2				SER5366A

RS-422/485 PCI Express Interface						
Port	Connecter	Baud Rate	ESD Protection	Surge Protection	Isolation Protection	Model NO.
8	DB44 Female	921.6Kbps	±15KV	600W	2.5KV	IPC-E2108SI
				600W	-	IPC-E2108S
4	DB44 Female	921.6Kbps	±15KV	600W	2.5KV	IPC-E2204SI
				600W	-	IPC-E2204S
2	DB9 Male	921.6Kbps	±15KV	600W	2.5KV	IPC-E2202SI
				600W	-	IPC-E2202S

RS-422/485 PCI Interface						
Port	Connecter	Baud Rate	ESD Protection	Surge Protection	Isolation Protection	Model NO.
16	DB78 Female	921.6Kbps	±15KV	-	-	IPC-P2116
8	DB44 Female	921.6Kbps	±15KV	600W	2.5KV	IPC-P2108SI
				-	-	IPC-P2108
4	DB44 Female	921.6Kbps	±15KV	600W	2.5KV	IPC-P2104SI
				-	-	IPC-P2104
2	DB9 Male	921.6Kbps	±15KV	600W	2.5KV	IPC-P2102SI
				-	-	IPC-P2102

RS-422/485 PCI/104 Interface						
Port	Connecter	Baud Rate	ESD Protection	Surge Protection	Isolation Protection	Model NO.
8	5x2 Pin Header	921.6Kbps	±15KV	600W	2.5KV	IPC-B2108SI
				-	-	IPC-B2108
4	5x2 Pin Header	921.6Kbps	±15KV	600W	2.5KV	IPC-B2104SI
				-	-	IPC-B2104
2	5x2 Pin Header	921.6Kbps	±15KV	600W	2.5KV	IPC-B2102SI
				-	-	IPC-B2102

RS-232/422/485 PCI Express Interface						
Port	Connecter	Baud Rate	ESD Protection	Surge Protection	Isolation Protection	Model NO.
8	DB44 Female	921.6Kbps	±15KV	-	-	IPC-E3108
4	DB44 Female	921.6Kbps	±15KV	600W	-	IPC-E3204S

RS-232/422/485 PCI Interface						
Port	Connecter	Baud Rate	ESD Protection	Surge Protection	Isolation Protection	Model NO.
8	DB44 Female	921.6Kbps	±15KV	-	-	IPC-P3108
4	DB44 Female	921.6Kbps	±15KV	-	-	IPC-P3104

### 5.3 Contact Information

Customer satisfaction is our number one concern, and to ensure that customers receive the full benefit of our products, SUNIX services has been set up to provide technical support, driver updates, product information, and user's manual updates.

The following services are provided

E-mail for technical support

..... [info@sunix.com](mailto:info@sunix.com)

World Wide Web (WWW) Site for product information:

..... <http://www.sunix.com>